

158EIA-LCF114-062

1-5/8" EIA Connector for 1-1/4" Coaxial Cable, RAPID FIT™ Sealing compound

158EIA-LCF114-062

Radio Frequency Systems' line of high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to CELLFLEX® coaxial cables. RFS Technologies connectors are fully tested for mechanical and electrical compliance specifications. They are available in all popular cable sizes in a variety of mating interfaces. To join two cables with EIA connectors, two identical socket connectors are installed on either end of the cables to be joined, and a coupling element is used to make the connection of the center conductor. The coupling element must be ordered. Connectors are available in sizes matching the nominal cable size. EIA connectors provide optimal power handling for the complete transmission line system.



FEATURES & BENEFITS

- Single-piece design for Fast and Easy Installation Reliable and simple attachment avoids unnecessary connector adjustments and provides outstanding performance every time. Saves time and provides cost savings.
- Robust Mechanical Design Low and consistent intermodulation performance guarantees outstanding system sensitivity.
- Excellent Electrical Performance Consistent and repeatable low VSWR improves overall system performance and margin and reduces mismatch losses
- Totally Waterproof according to IP 68 Assures safe, long term operation in the harshest of Environments.

GENERAL SPECIFICATIONS

Transmission Line Type	Coaxial Cable with Copper Conductors (not for LITE Types with Aluminium Conductor)
Cable Size	1-1/4
Cable Type	Foam Dielectric
Model Series	for all LCF, LCFS, UCF and RCF 114-50 A-Series
Connector Interface	1-5/8" EIA
Connector Type	RAPID FIT™
Sealing Method	Sealing compound ¹)
Gender	None

ELECTRICAL SPECIFICATIONS

3rd Order IM Product @ 2x20 Watts	dBc	<-156
Maximum Frequency	GHz	3.3
VSWR, Return Loss	VSWR (dB)	0 < f < 1.0 GHz: 1.02 (40) 1.0 ? f < 2.2 GHz: 1.04 (34.1) 2.2 ? f < 2.7 GHz: 1.06 (30.7) 2.7 ? f < 3.3 GHz: 1.08 (28.3)



158EIA-LCF114-062

1-5/8" EIA Connector for 1-1/4" Coaxial Cable, RAPID FIT™ Sealing compound

158EIA-LCF114-062

MECHANICAL SPECIFICATIONS

Plating Outer/Inner		Silver/Silver
Length	mm (in)	95 (3.74)
Outer Diameter	mm (in)	88.5 (3.5)
Inner Contact Attachment		Spring Finger
Outer Contact Attachment		Spring Finger

ACCESSORIES

Wrench size front	mm (in)	Poly Hook Spanner Wrench
Wrench size rear	mm (in)	Poly Hook Spanner Wrench
Trimming Tool		Universal Trimming Tool TRIM-Set-L114-D01

TESTING AND ENVIRONMENTAL


Waterproof Level		IP68
Sealing Volume, cm3 (ounces)	cm³ (ounces)	20 (0.68)

158EIA-LCF114-062

1-5/8" EIA Connector for 1-1/4" Coaxial Cable, RAPID FIT™ Sealing compound

158EIA-LCF114-062

ADDITIONAL IMAGES

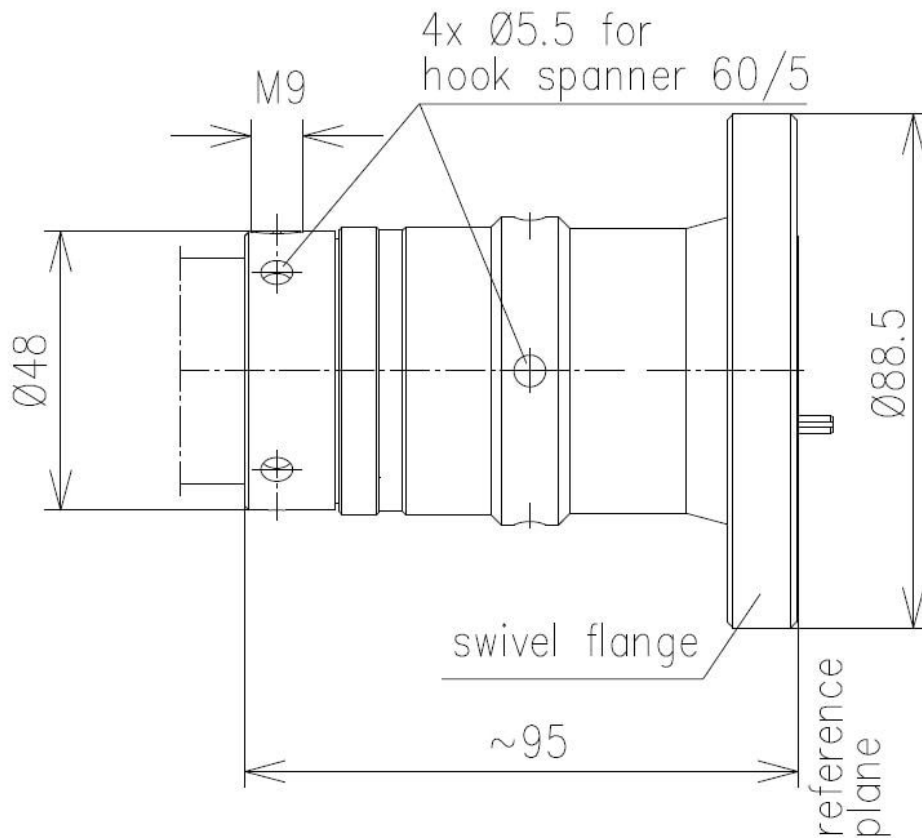

EXTERNAL DOCUMENT LINKS & NOTES

[Installation Instruction](#)

¹⁾ The sealing compound must be ordered separately.