

**C137-065TG-PRETUNED**

Connector for FLEXWELL® Elliptical Waveguide E65/EP65, CPR137G Flange, Pre-tuned

Tunable connector for FLEXWELL® Elliptical Waveguide E65/EP65

CPR137G flange, Gasket sealed

Pre-tuned in the factory to achieve optimal electrical performance in a designated frequency range within 5.9 to 7.125 GHz

[FEATURES / BENEFITS](#)**Superior Design**

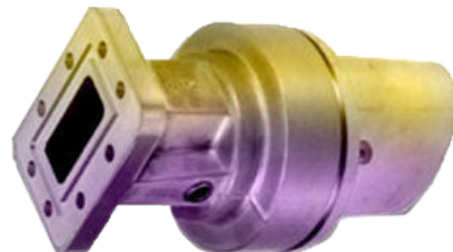
- Fewer tuning screws
- Better performance

Quick & Easy Installation

- Flaring tools not required
- Assemble using standard hand tools performance

Assorted Connector Types

- Standard (non-tunable), tunable and pre-tuned versions are available
- Two basic interface series - flange can mate with either a choke or a cover flange

**Technical features****STRUCTURE**

Transmission Line Type		Elliptical Waveguide
Cable Type		E65 / EP65
Model Series		E65 / EP65 Series
Connector Frequency Range	GHz	5.9 - 7.125
Connector Type		Pre-tuned
Sealing Method		Gasket
Gas Inlet		NPT 1/8, tube adaptor not included
Connector Interface		CPR137G

MECHANICAL SPECIFICATIONS

Length	mm (in)	132 (5.2)
Outer Diameter	mm (in)	74 (2.9)
Weight	kg (lb)	1.72 (3.8)

[External Document Links](#)[Installation Instruction](#)[Notes](#)VSWR / return loss value 1:1.062 / 30.5 dB @ 5.9 - 7.125 GHz with
Premium FLEXWELL waveguide

VSWR / return loss value 1:1.15 / 23.1 dB @ 5.9 - 7.125 GHz with



C137-065TG-PRETUNED

Connector for FLEXWELL® Elliptical Waveguide E65/EP65, CPR137G Flange, Pre-tuned

Standard FLEXWELL waveguide