

43F-LCF12-CP01

4.3-10 Female Compression Connector for 1/2" Coaxial Low Loss Cable, Straight

43F-LCF12-CP01

RFS Technologies' high performance Compression Connectors are designed for CELLFLEX® cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment using compressing technologies. All RFS Technologies' connectors are fully tested for mechanical and electrical compliance to industry specifications. The 4.3-10 connector is an innovative, space-saving RF connection meeting all requirements even under the most severe environmental conditions and not relying on coupling nut torque. Sealing against outer conductor and jacket by means of the o-ring and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket.



FEATURES & BENEFITS

- One-piece design together with Compression tools to minimize installation time required, improve installation security
- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Watertight sealing to IP68
- Tri metal alloy plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

GENERAL SPECIFICATIONS

Transmission Line Type		Coaxial Cable LCF12, ICA12, RCA12
Cable Size		1/2
Cable Type		Foam or Air Dielectric, Low Loss
Model Series		LCF12, ICA12, RCA12-50 Series
Connector Interface		4.3-10
Connector Type		Compression Connector PREMIUM Straight
Sealing Method		360° Compression
Gender		Female

ELECTRICAL SPECIFICATIONS

Nominal Impedance, ohms	Ohm	50
Insertion loss	dB	±0.05
3rd Order IM Product @ 2x20 Watts	dBc	-160
Maximum Frequency	GHz	6
VSWR, Return Loss	VSWR (dB)	DC<f?3.0 GHz: 1.05 (32.3) 3.0<f?6.0 GHz: 1.10 (26.4)

43F-LCF12-CP01

4.3-10 Female Compression Connector for 1/2" Coaxial Low Loss Cable, Straight

43F-LCF12-CP01

MECHANICAL SPECIFICATIONS

Plating Outer/Inner		Tri metal alloy / Silver
Length	mm (in)	65.2 (2.57)
Outer Diameter	mm (in)	26 (1.024)
Weight	kg (lb)	0.141 (0.311)
Inner Contact Attachment		Compression
Outer Contact Attachment		360° clamping


ACCESSORIES

Trimming Tool		AFBXD05?2(Trimming), AFBXD07?4(Foam Remover)
---------------	--	--

TESTING AND ENVIRONMENTAL

Waterproof Level		IP68
Operation Temperature	°C(°F)	-40 to 85 (-40 to 185)


ADDITIONAL IMAGES

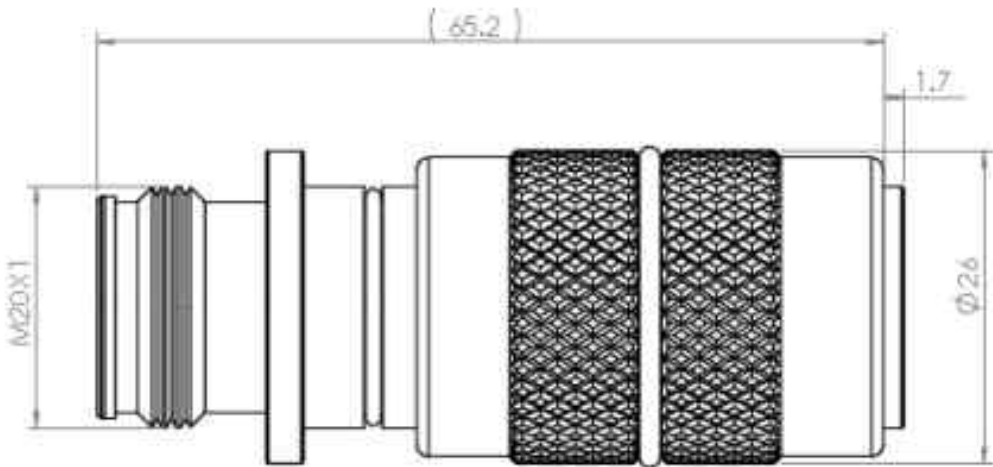

43F-LCF12-CP01

4.3-10 Female Compression Connector for 1/2" Coaxial Low Loss Cable, Straight

43F-LCF12-CP01

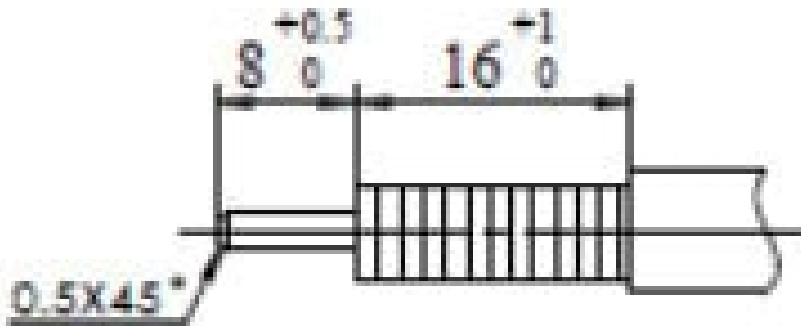

**RECOMMENDED
CABLE STRIPPING DIMS**

EXTERNAL DOCUMENT LINKS & NOTES

[Installation Instruction](#)