


**CC-RE60-4**Clic clamp for RADIAFLEX[®] RE60

Clic Clamp for RADIAFLEX RE60, Polyamide, Grey, Halogen Free,
Fire Class UL94HB

FEATURES / BENEFITS

Safe and efficient installation of RADIAFLEX[®] cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

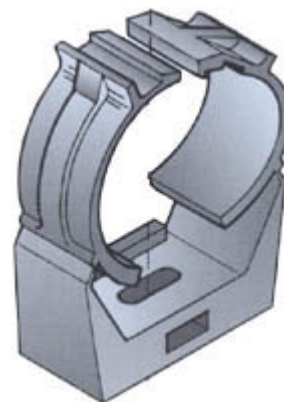

clic_clamp_T1

Technical features**GENERAL SPECIFICATIONS**

Product Line		Radiating Cable Accessories
Product Type		Hanger
Hanger Type		Clic clamp
Transmission Line Type		Radiating Waveguide RE60 in combination with Clamp Lining LIN-60/48-H
Cable Type		Radiating Cable
Color		Grey

MECHANICAL SPECIFICATIONS

Cable Size		RE60
Number of Cable / Waveguide Runs		1
Material		Polyamide

TESTING AND ENVIRONMENTAL

Fire Class		UL94 HB
------------	--	---------

TEMPERATURE SPECIFICATIONS

Installation Temperature	°C (°F)	-20 to 80 (-4 to 176)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)


PACKAGING INFORMATION

Package Quantity		20
------------------	--	----



CC-RE60-4

Clic clamp for RADIAFLEX® RE60

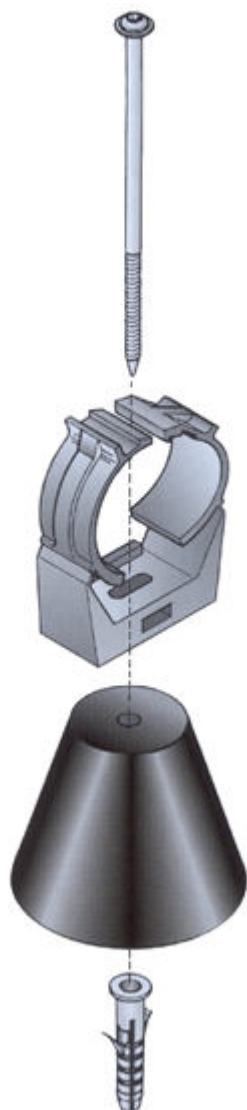

External Document Links

Notes