



RFS Technologies TPS* Tapper product family has been designed to support a variety of wireless applications in the frequency band from 694 to 3800MHz. The units couple off a defined fraction of a RF signal from typically 3 to 30 dB with minimal reflections or loss. The broad frequency range is ideally suited for 3G / 4G / 5G multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables. Notably, these products feature a low level of network interferences due to their PIM optimized desing.

FEATURES / BENEFITS

- Split ratio 6:1 / 8dB
- Minimized RF insertion loss
- PIM optimized desing
- Small size and weight
- N-female connectors

NO IMAGE
AVAILABLE

Technical features

STRUCTURE

Product Type		Unequal Divider/Tapper
Techn. Application		Indoor
Number of Input Ports		1
Number of Output Ports		2

ELECTRICAL SPECIFICATIONS

Frequency Range	MHz	694 - 3800
Connector Type		N female
Max. VSWR / Return Loss	VSWR/dB	1.30/17.7 (1.3)
Insertion Loss max.	dB	0.8
Coupling Value	dB	8.5
Coupling Flatness max.	dB	+1.0 / -2.0
Intermodulation (IM3)		155dBc (2x43dBm)
Impedance	Ohm	50
Total Input Power	W	200

TEMPERATURE SPECIFICATIONS


Temperature Range	°C (°F)	-25 to +65 (-13 to +149)
-------------------	---------	--------------------------

MECHANICAL SPECIFICATIONS

Height	mm (in)	47.4 (1.87)
Width	mm (in)	19.5 (0.77)
Length	mm (in)	79.8 (3.14)

TESTING AND ENVIRONMENTAL

Environmental Class		IP65
---------------------	--	------

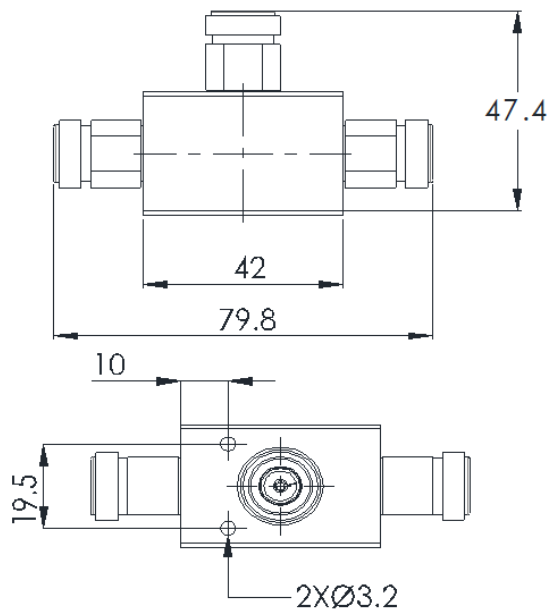

[External Document Links](#)

[Notes](#)